


# SENERGY-Ai

## Part numbers example

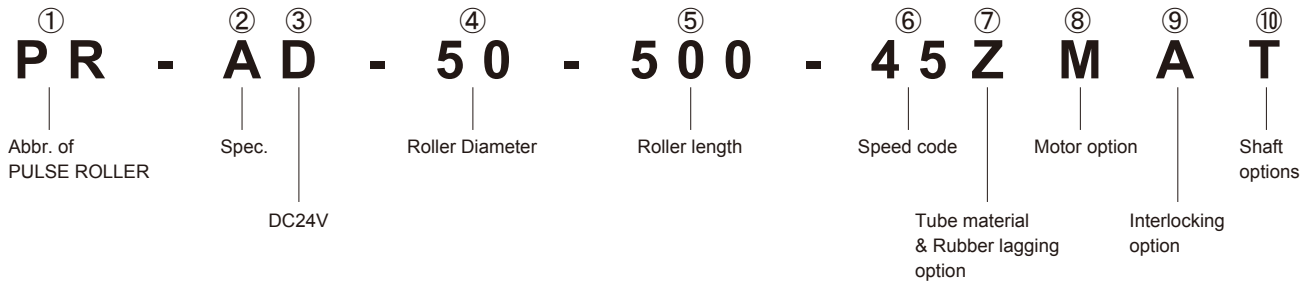

### ② Spec.

- A** --- Standard
- Z** --- Freezer rated (-30°C)
- W** --- Wash-down rated (IP-66)

### ④ Roller Diameter

- 48** ---φ48.6
- 57** ---φ57.0
- 50** ---φ50.0
- 60** ---φ60.5

### ⑤ Roller length

Dimension RL (Unit: mm) \*Available for every 1 mm unit

### ⑥ Speed code

Selection of speed range \*See Characteristics data table for available speed codes.

### ⑦ Tube material & Rubber lagging option

- Z** --- Steel, Zinc plating, No lagging \*Z is standard for Dia. 48.6 and 50.
- A** --- Steel, Unichrome plating, No lagging \*A is standard for Wash-down rated and Dia. 57 & 60.5.
- J** --- Stainless tube
- B** --- 3 mm Black rubber
- W** --- 3 mm Urethane
- Q** --- 2 mm PVC sleeve

### ⑧ Motor option

- M** --- SENERGY-Ai (M8 connector)

### ⑨ Interlocking option

- A** --- Plain straight, No interlocking
- B** --- V-Pulley
- G** --- Round groove
- H** --- Micro V-pulley (Poly vee)

### ⑩ Shaft options

- T** --- M12 threaded hex (Cable end) + M8 female threaded
- P** --- M12 threaded hex (Cable end) + Spring-loaded hex
- F** --- Non threaded hex (Cable end) + M8 female threaded
- Q** --- Non threaded hex (Cable end) + Spring-loaded hex
- Y** --- Specialty