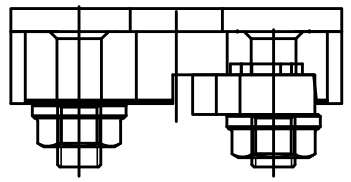

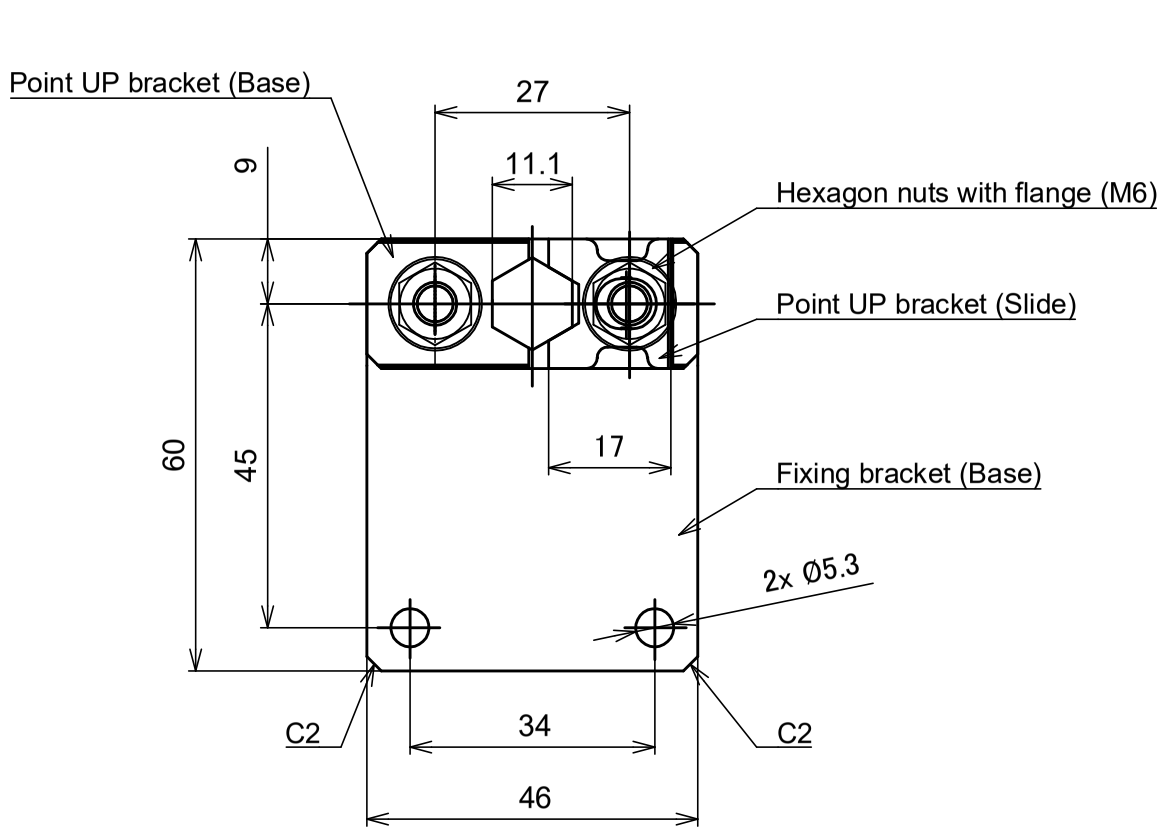

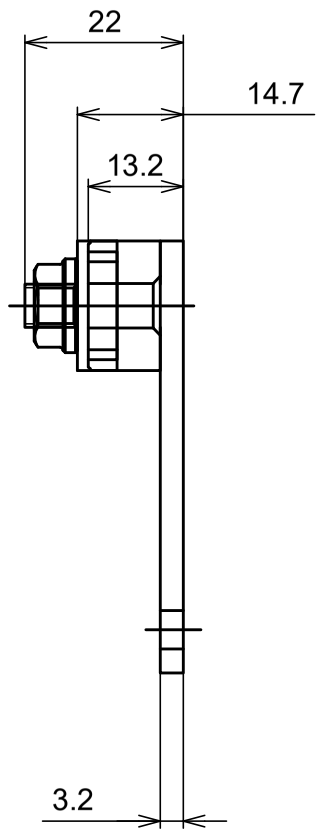

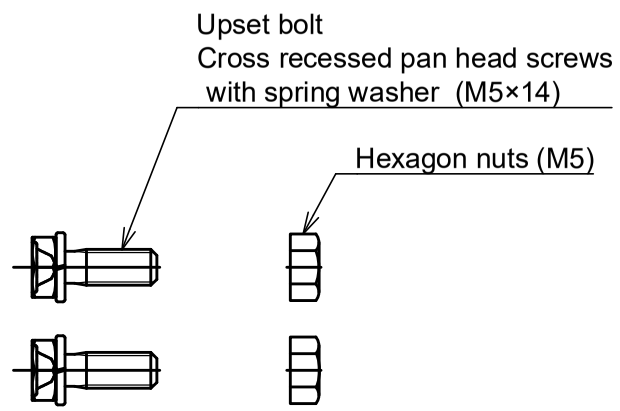

Installation

Tightening toruque (M6) : 70.8-88.5 in-lb (8 - 10 N-m)
Tightening toruque (M5) : 20.4-30.9 in-lb (2.3 - 3.5 N-m)

PULSEROLLER
WEB: WWW.PULSEROLLER.COM
SUPPORT: SUPPORT@PULSEROLLER.COM
SALES: SALES@PULSEROLLER.COM

REV.	DATE	DESCRIPTION	✓
A	21-MAY-2020	CONVERTED TO METRIC, UPDATE TITLE BLOCK	
B	05-APR-2021	ADDED N-M TO INSTALLATION TORQUE	

THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL, IS SUBMITTED IN CONFIDENCE, AND IS PROPRIETARY INFORMATION OF PULSEROLLER AND SHALL BE USED ONLY IN CONJUNCTION WITH AND PERFORMANCE OF THE CONTRACT OF WHICH THIS DRAWING FORMS A PART, AND SHALL NOT, WITHOUT PULSEROLLER PRIOR WRITTEN APPROVAL, BE REPRODUCED OR IN ANY OTHER WAY USED IN WHOLE OR IN PART BY OTHERS.

DATE: 21-MAR-2015
DESIGNED BY: JPK
CHECKED BY:
SCALE: NONE
SHEET: 1 OF 1

TITLE: FIXING BRACKET – POINT UP STANDARD
PART NUMBER PR-D-30H-PU-N

FOR: SENERGY ACCESSORIES
PULSEROLLER STANDARDS

DWG. NO: PR-D-30H-PU-N REV: B